

# Premier EMSW

The EMSW is a surface applied electro-hydraulic operator designed for a wide variety of applications. It is suitable for almost all types of external and internal swing doors. The operator can be mounted on either side of the door for pull or push action and is suitable for single or double doors fitted with butt hinges or pivots. The EMSW is just as suitable for disabled access, nursing homes and hospital corridors – where the requirements are for flexible operation and reliability – as it is for department stores, banks and hotels with high density traffic and difficult operating conditions.



## Design

The compact design of the EMSW is suitable for different doors and customer requirements. The operator works electro-hydraulically. It opens with a motor and closes with a spring. The opening and closing speeds can be varied individually.

The motor, oil pump and hydraulic unit are combined into a compact unit mounted next to the control unit within the cover.

The operator is connected to the door leaf with either a pushing or a pulling arm system.

## Models

- EMSW – for single doors – one drive unit and one control unit fitted under a standard length cover.
- EMSW-2 – for double doors – two drive units with control unit and slave control unit fitted under a cover with optional length for parallel operation of two doors.



Highly intelligent control

## Arm Systems

- PUSH – Pushing arm system, used for fire approved doors where the operator is installed on the wall on the opposite side of the door swing. Door opening angle adjustable up to 120°.
- PULL – Pulling arm system where the operator is installed on the wall on the same side as the door swing. Door opening angle adjustable up to 120°.
- Shaft extensions – Allow the operator to be fitted higher on the wall or the arm lower on the door leaf.

## Fire Doors

The EMSW offers an excellent fire rating and is approved for fire door installations by the German and Swedish authorities.



Heavy duty motor pump

# Technical Specification

## Standard Equipment


- Cover in clear anodized aluminum.
- Control unit CSDA – with possibility to connect manual and automatic activation units, programme selector PS-3A and electric striking plates.
- Telescopic extension arm.
- Shaft extension.
- Black SAS-F PUSH/PULL arm system accessories
- Coordination unit COOA which ensures that rebated doors close in correct order.
- EntreMatic's range of manual and automatic activation units.
- Impulse and presence detection..
- Power supply: 230 V AC, 50 Hz

- Weight of operator 11.5 kg
- Auxiliary voltage: 13- 20 V DC 24 V DC
- Power consumption: max. 230 W
- Ambient temperature: -15° to +50°C
- Recommended max. door weight: 250kg for door leaf width 1600 mm

The EMSW meets requirements for door weights/widths stated in the:

- Controlled door closing, EN 1154 size 3 – 6
- Electrically powered hold open device for swing doors, EN 1155
- Coordination unit for rebated doors, EN 1158
- ANSI/BHMA A156.10, A156.19
- UL325/CUL325
- SITAC 0166/99

### EMSW Automatic Swing Operator Push Version

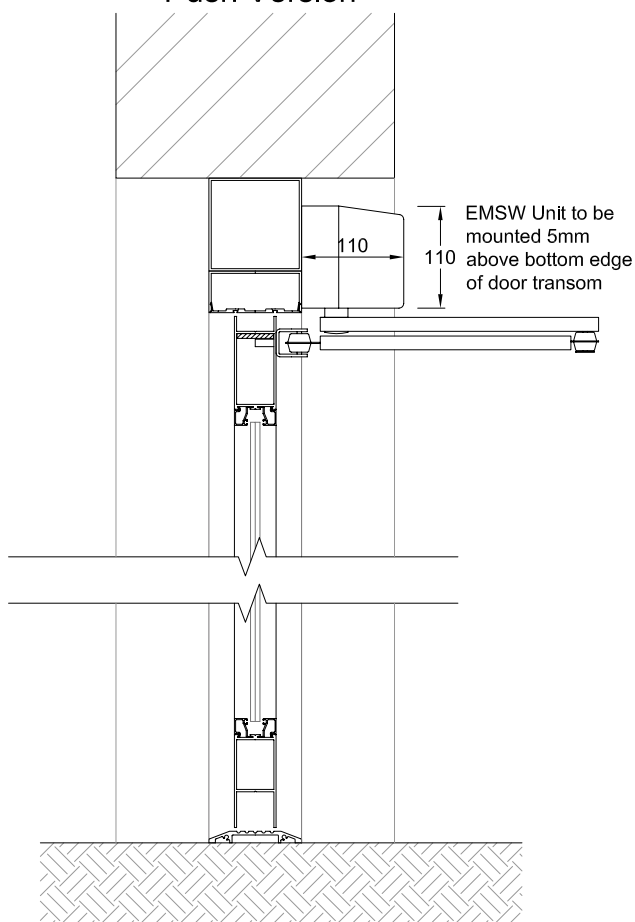

### EMSW Automatic Swing Operator Pull Version

